

Data Sheet

Level Plus[®] – CHAMBERED

Magnetostrictive Liquid Level Transmitters with Temposonics[®] Technology

- Designed for Magnetic Level Gauge (MLG)
- No scheduled maintenance or recalibration
- Hazardous area certified



MEASURING TECHNOLOGY

The absolute, linear position sensors provided by Temposonics rely on the company's proprietary Temposonics® magnetostrictive technology, which can determine positions with a high level of precision and robustness. Each Temposonics® position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the end of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.

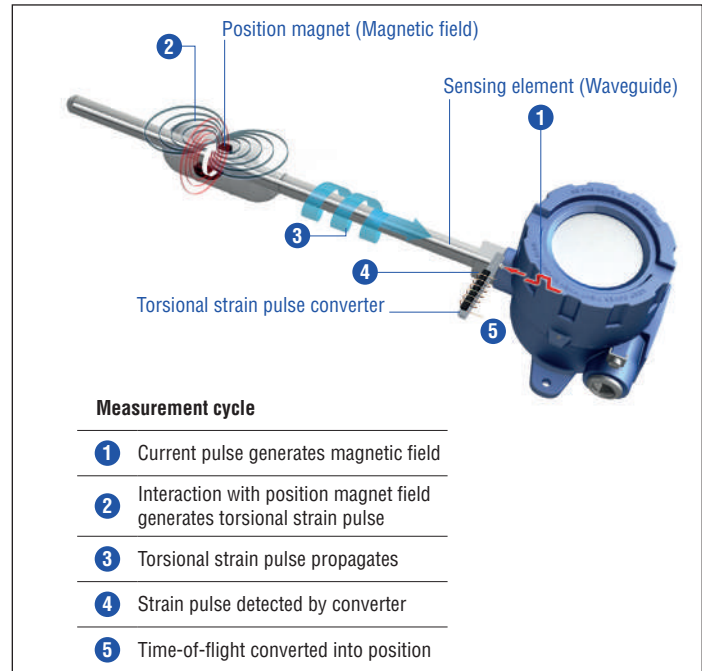


Fig. 1: Time-of-flight based magnetostrictive position sensing principle

CHAMBERED

The Level Plus® CHAMBERED level transmitter satisfies the demand for an accurate and robust liquid-level sensor with unsurpassed flexibility to meet most process application conditions. The CHAMBERED transmitter provides external measurement of most Magnetic Level Gauges (MLG) from popular suppliers. Once the transmitter is installed and calibrated there is no requirement for scheduled maintenance or recalibration. **Set it and forget it!**

Features:

- No scheduled maintenance or recalibration
- Integral display
- Intrinsically safe
- Explosionproof/flameproof

Applications:

- Magnetic Level Gauge
- Bypass chamber

Markets:

- Petroleum and petrochemical
- Chemical
- Power generation

Compatible with:

- Houdec
- Hawk
- Bliss Anand
- Jerguson
- Kenco
- Wika
- Quest-tec
- Penberthy
- Klinger
- ISE Magtech
- ABB (K-tek)
- Bonetti
- SOR
- Krohne
- Nihon Klingage
- FOXC
- KSR Kuebler
- Shridhan

Standard	Certification
FM 3610 ISA 60079-11:2014	Class I, Div. 1, Groups A, B, C, D T4 Class I, Zone 0, AEx ia IIC T4 Ga Ta= -50 to 71 °C: IP65
C22.2 No. 157 C22.2 No. 60079-11:2014	Class I, Div. 1, Groups A, B, C, D T4 Class I, Zone 0, Ex ia IIC T4 Ga Ta= -50 to 71 °C: IP65
EN 60079-11:2012	FM14ATEX0068X ⊕ Ex II 1 G Ex ia IIC T4 Ga Ta= -50 to 71 °C: IP65
IEC 60079-11:2011	IECEx FMG 14.0032X Ex ia IIC T4 Ga Ta= -50 to 71 °C: IP65
FM 3615 ISA 60079-1	Class I, Div. 1, Groups A, B, C, D T6...T3 Class I, Zone 0/1, AEx db IIB+H2 T6...T3 Ga/Gb Ta= -40 to 71 °C: IP65
C22.2 No. 30 C22.2 No. 60079-1	Class I, Div. 1, Groups B, C, D T6...T3 Ex db IIB+H2 T6...T3 Ga/Gb Ta= -40 to 71 °C: IP65
EN 60079-1:2014	FM16ATEX0068X ⊕ Ex II ½ G Ex db IIB+H2 T6...T3 Ga/Gb Ta= -40 to 71 °C: IP65
IEC 60079-1:2011	IECEx FMG 16.0033X Ex db IIB+H2 T6...T3 Ga/Gb Ta= -40 to 71 °C: IP65

Fig. 2: Certifications of CHAMBERED level transmitter

TECHNICAL DATA

Level output	
Measured variable	Product level
Output signal/protocol	Modbus RTU, DDA, Analog (4...20 mA), HART®
Order length	305...3658 mm (12...144 in.) (Order length equals the measurement range plus the inactive zone. Contact factory for longer lengths)
Inherent accuracy	±1 mm (0.039 in.)
Repeatability	0.001 % F.S. or 0.381 mm (0.015 in.) whichever is greater (any direction)
Electronics	
Input voltage	10.5...28 VDC
Fail safe	High, full scale (Modbus, DDA) Low, 3.5 mA default or high, 22.8 mA (Analog, HART®)
Reverse polarity protection	Series diode
EMC	EN 61326-1, EN 61326-2-3, EN 61326-3-2, EN 61000-6-2, EN 61000-6-3, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8
Environmental	
Enclosure rating	NEMA Type 4X, IP65
Humidity	0...100 % relative humidity, no condensation
Operating temperatures	Electronics: -40...+71 °C (-40...+160 °F) Sensing element: -40...+125 °C (-40...+257 °F) (Contact factory for specific temperature ranges)
Materials	316L stainless steel, epoxy coated aluminum
Field installation	
Housing dimensions	Single cavity: 145 mm (5.7 in.) W × by 127 mm (5 in.) D × 109 mm (4.3 in.) H Dual cavity: 117 mm (4.6 in.) W × by 127 mm (5 in.) D × 206 mm (8.1 in.) H Stainless steel single cavity: 178 mm (7.1 in.) W × by 135 mm (5.3 in.) D × 153 mm (6 in.) H
Wiring	
Connections	4-wire shielded cable or twisted pair, Daniel Woodhead 6 pin male connector, 4570 mm (180 in.) integral cable with pigtail
Electrical connections	
Single and dual cavity	¾ " FNPT conduit opening, M20 for ATEX/IECEx version
NEMA Type 4X	½ " FNPT conduit opening
Display	
Measured variables	Product level

TECHNICAL DRAWING

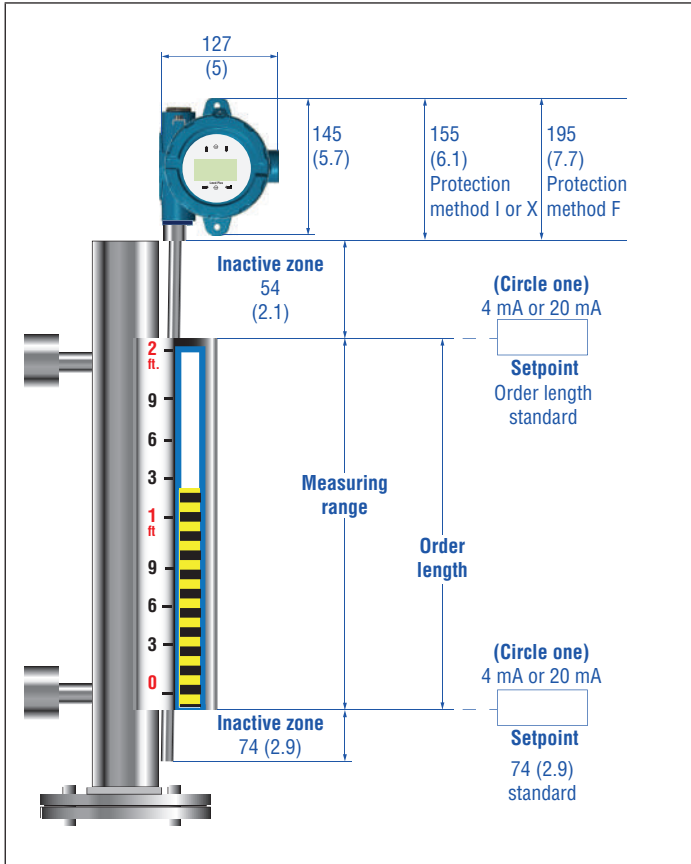


Fig. 3: CHAMBERED mounting, bottom flange¹

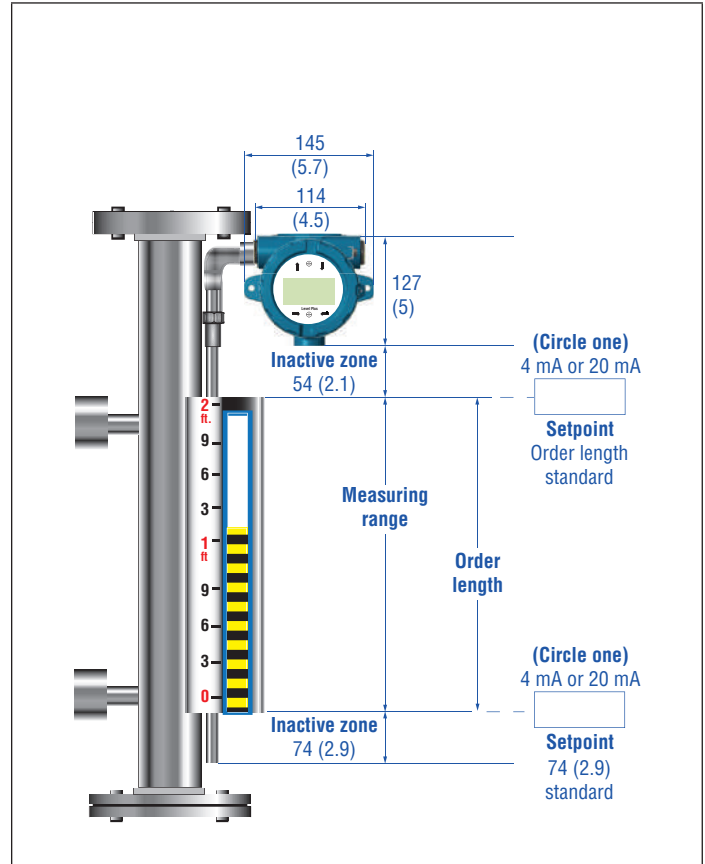


Fig. 4: CHAMBERED mounting, top and bottom flange¹

LEVEL TRANSMITTER INACTIVE ZONE REFERENCE

Order length	Inactive zone
< 3658 mm (144 in.)	74 mm (2.9 in.)

Controlling design dimensions are in millimeters and measurements in () are in inches

1/ The ambient temperature rating, Ta = -50 °C (-58 °F) to 71 °C (160 °F), must not be exceeded due to the mounting of the level transmitter to the MLG and exposure to the process temperature

ORDER CODE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
L	P	C					1	X	X	0	X										
a		b		c	d	e	f	g	h	i	j	k	l	m	n	o				p	

a	Sensor model		
L	P	C	CHAMBERED level transmitter

b	Output
D	DDA
M	Modbus
3	1 Loop with HART®
6	1 Loop with HART® and SIL 2

c	Housing type
D	Single cavity with display
E	Dual cavity with display
L	Stainless steel single cavity with display

d	Electronics mounting
3	90° bend (housing top left)
4	90° bend (housing top right)
5	90° bend (housing bottom left)
6	90° bend (housing bottom right)
7	Top mount (housing top right)
8	Bottom mount (housing bottom left)

e	Sensor pipe
B	5/8" OD pipe
R	1/2" OD pipe
Y	10 mm OD pipe

f	Materials of construction (wetted parts) ²
1	316L stainless steel

g	Process connection type
X	None

h	Process connection size
X	None

i	Number of digital thermometers (DT's)
0	None

j	Digital thermometer placement
X	None

k	Notified body
B	INMETRO
C	CEC (FMC)
E	ATEX
F	NEC (FM)
I	IEC
K	KC
N	NEPSI
P	CCOE
T	CML/TIIS
X	None

l	Protection method
F	Explosionproof/flameproof (only for housing type D, E, or L)
I	Intrinsically safe
X	No approval

m	Gas group
A	Group A (not available with "C = CEC (FMC)" notified body and "F = Flameproof/explosion" proof protection method)
B	Group B
C	Group C
D	Group D
3	IIC (intrinsically safe only)
4	IIB + H2 (explosionproof/flameproof only)
X	None

2/ Note: Contact factory for other materials

Level Plus® CHAMBERED

Data Sheet

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
L	P	C					1	X	X	0	X										
a			b	c	d	e	f	g	h	i	j	k	l	m	n	o					p

n	Unit of measure
M	Metric – Millimeters
U	US customary – inches

o	Length (no decimal spaces)
X X X X X	305...3658 mm (code as 00305...03658)
X X X X X	12...144 in. (code as 01200...14400)

p	Special
R	Reverse measurement (Select with Electronic Mount 5, 6, and 8)
S	Standard product

NOTICE

Accessories such as floats, cables, and remote displays have to be ordered separately. All accessories are shown in the [Accessories Catalog \(551103\)](#).

Manuals, Software & 3D Models available at:
www.temposonics.com

Document Part Number:
551697 Revision F (EN) 02/2022

UNITED STATES 3001 Sheldon Drive
Temposonics, LLC Cary, N.C. 27513
Americas & APAC Region Phone: +1 919 677-0100
E-mail: info.us@temposonics.com

GERMANY Auf dem Schüffel 9
Temposonics 58513 Lüdenscheid
GmbH & Co. KG Phone: +49 2351 9587-0
EMEA Region & India E-mail: info.de@temposonics.com

ITALY Phone: +39 030 988 3819
Branch Office E-mail: info.it@temposonics.com

FRANCE Phone: +33 6 14 060 728
Branch Office E-mail: info.fr@temposonics.com

UK Phone: +44 79 44 15 03 00
Branch Office E-mail: info.uk@temposonics.com

SCANDINAVIA Phone: + 46 70 29 91 281
Branch Office E-mail: info.sca@temposonics.com

CHINA Phone: +86 21 2415 1000 / 2415 1001
Branch Office E-mail: info.cn@temposonics.com

JAPAN Phone: +81 3 6416 1063
Branch Office E-mail: info.jp@temposonics.com



temposonics.com